

Sundance® Spas 680 Prado™

Specifications

Dimensions	80" x 80" x 33" (203 cm x 203 cm x 84 cm)
Perimeter	320" (812.8 cm)
Seating Capacity	4-5 Adults
Dry Weight	TBD lbs (TBD kg)
Filled Weight (Spa Volume)	TBD lbs (TBD kg)
Filled Weight (Average Fill)	TBD lbs (TBD kg)
Water Capacity (Spa Volume)	TBD US gallons (TBD Liters)
Water Capacity (Average Fill)	TBD US gallons (TBD Liters)
Electronic Controls	Solid state electronic controls with LCD readout, programmable temperature, filtration, and heat cycles
Pump 1	North America (60 Hz): 2-Speed, 2.5 HP brake, 1.5 HP continuous, 48 Frame Export (50 Hz): 2-Speed, 2.0 HP continuous
Total Hydrojets:	26
Seat A Jets:	3 - SL3, 1 - SL5R
Seat B Jets:	1 - SLR, 1 - SL3, 8 - SL
Seat C Jet:	1 - SL3R
Seat D Jets:	6 - SL3
Seat E Jets:	4 - SL3R
Air Controls/Massage Selectors:	2/None
Filter:	75 ft² MicroClean® Mini™ Filter Cartridge System
Water Treatment:	Factory installed CLEARRAY® unit
Lighting:	LED Lighting System (Interior Surround); 2 Standard Exterior Lights
Cabinet:	Available in Slate, Graphite
Shell Colors:	North America: Platinum, Celestite (Gypsum), Monaco, Midnight, Porcelain Export (50 Hz): All North America colors
Headrest:	Four, 1-piece gray
Heater:	North America (60 Hz): High Flow, 1 kW@120 VAC or Convertible to 4 kW@240 VAC; Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements:	North America Convertible Model (60 Hz): 120 VAC@15A with Supplied GFCI Cord or 240 VAC@30A or 40A (Hard Wired Only); Export (50 Hz): 230-240 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/ RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets
Alternative Insulation (Standard):	Yes (Insulation Panels)
Waterfall Feature:	None
Audio System (Optional):	N/A
Special Features (Optional):	Factory Installed SmartTub® module



Sundance Spas 680 Prado

Operation/Seat Depths



(A) Air control - Activates Seat A Jets (3 - SL3, 1 - SL5R) + Seat B Jets (1 - SLR, 1 - SL3, 8 - SL) + Seat C Jet (1 - SL3R)

(B) Air control - Activates Seat D Jets (6 - SL3) + Seat E Jets (4 - SL3R)

• Jets Pump 1: Powers All Jets when running

26 Total Jets



SL Jets (8)



SLR Jets (2)



SL3 Jets (10)



SL3R Jets (5)



SL5R Jet (1)

Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 23.50" (59.69 cm)

B = 20.75" (52.71 cm)

C = 25.00" (63.50 cm)

D = 22.00" (55.88 cm)


E = 25.50" (64.77 cm)

F = 23.75" (60.33 cm)

G = 21.75" (55.25 cm)

H = 30.00" (76.20 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**

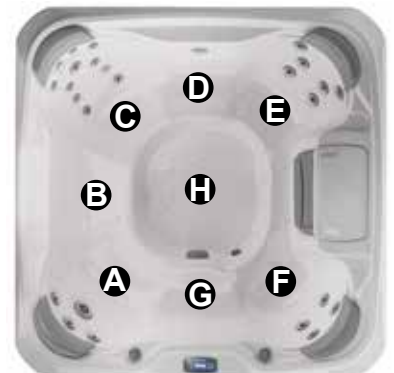


Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Prado

Portable Dimensions

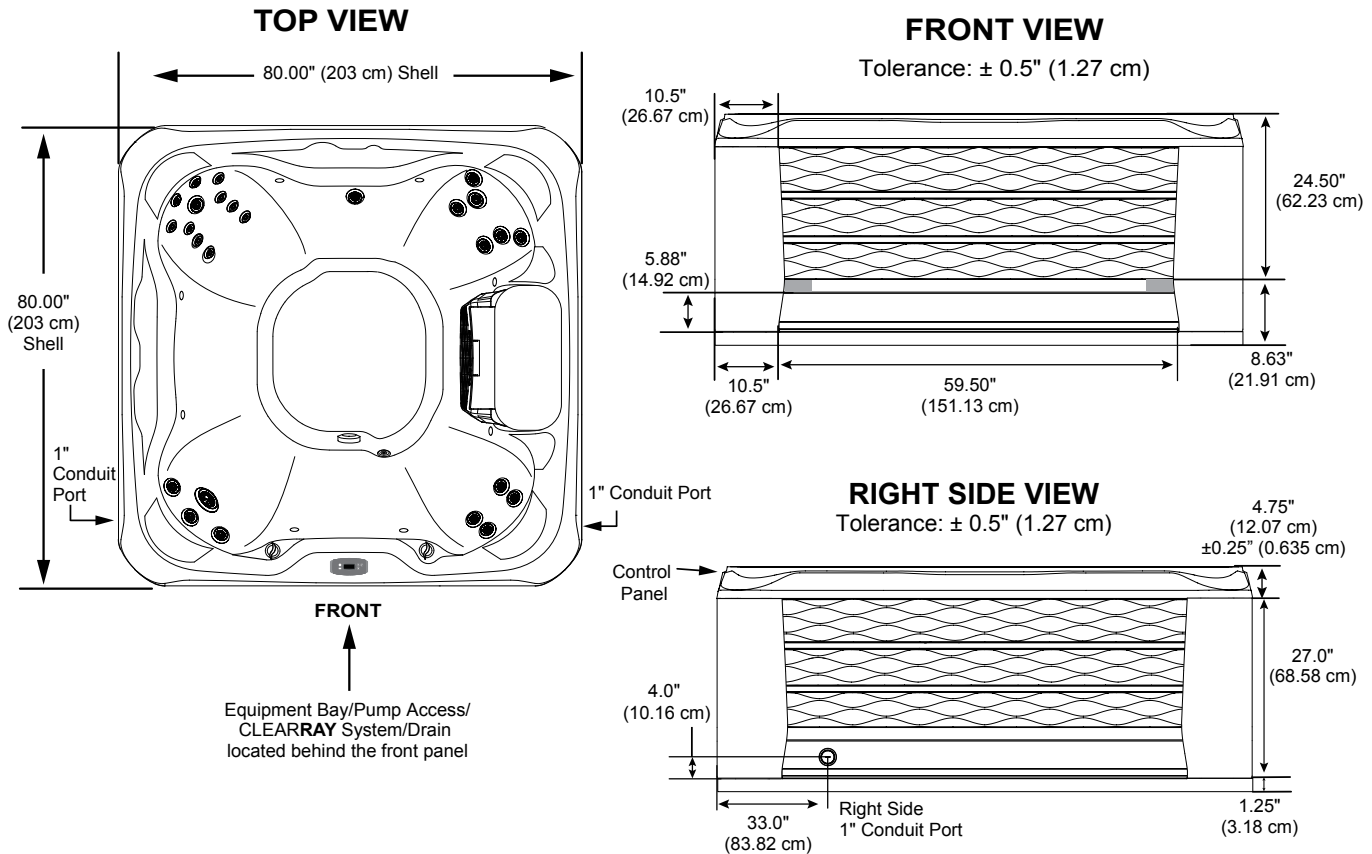

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

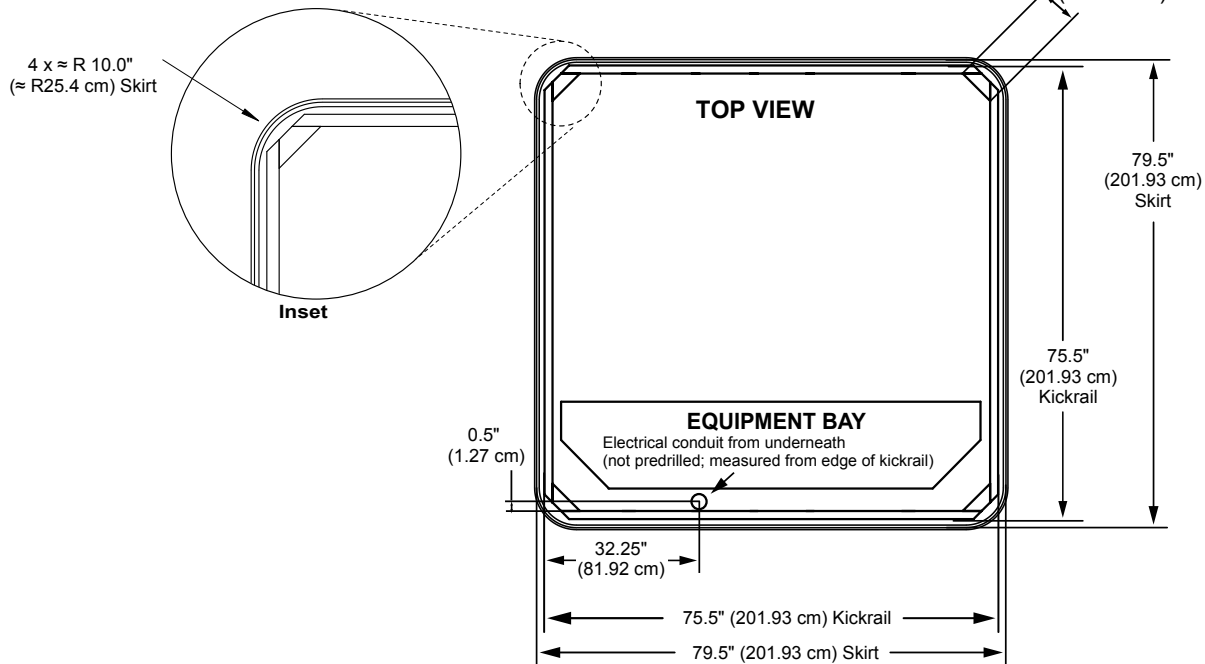

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice